

Standard Viton Gaskets



Viton gaskets

Features and benefits

- Designed in accordance with ASME-BPE standards
- USP Class VI compliant and animal derived component free (ADCF)
- Compliant with FDA regulations CFR 21 177.2604
- Lot numbering enables product traceability
- Improved heat, acid and chemical resistance
- Available in flanged and unflanged options in a range of sizes
- Viton® is a registered trademark of Chemours Company




Technical specifications

	Standard Viton Gaskets
Gasket type	Unflanged
Internal diameter	22.9 - 147.8 mm
Internal diameter	0.9 - 5.82 in
External diameter	50.3 - 165.4 mm
External diameter	1.98 - 6.51 in
Size	1, 1.5, 2, 2.5, 3, 4, 6 in
Quantity	25 PCS
Certification	ADCF, USP Class VI
Operating temperature range	-23 °C to 204 °C
Operating temperature range	-10 °F to 400 °F
Shelf life	5 years

Materials of construction

	Standard Viton Gaskets
Material	Viton®

Product codes

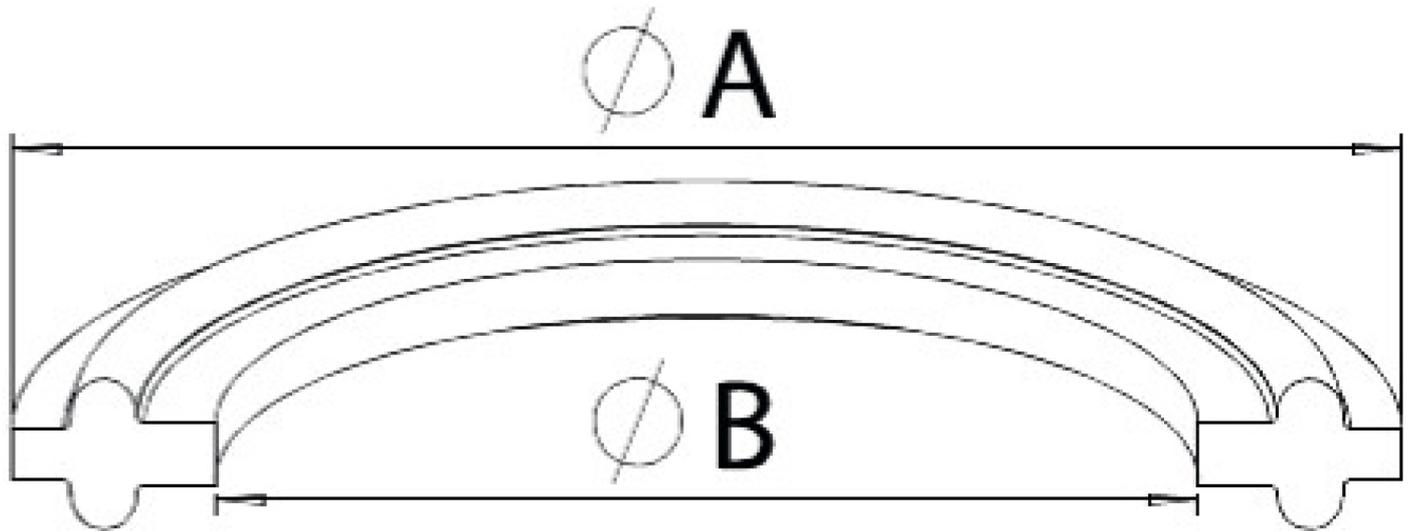

BioPure Viton® Gasket				
Part number	Size inch	O.D (A)	I.D (B)	Quantity
40MPSFY-100-25	1	1.98 (50.3)	0.90 (22.9)	25
40MPSFY-150-25	1 1/2	1.98 (50.3)	1.40 (35.6)	25
40MPSFY-200-25	2	2.52 (64.0)	1.90 (48.3)	25
40MPSFY-250-25	2 1/2	3.05 (77.5)	2.40 (61.0)	25
40MPSFY-300-25	3	3.58 (90.9)	2.90 (73.7)	25
40MPSFY-400-25	4	4.68 (118.9)	3.87 (98.3)	25
40MOSFY-600-25	6	6.51 (165.4)	5.82 (147.8)	25

Disclaimer: The information contained in this document is believed to be correct but Watson-Marlow Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the user's responsibility to ensure product suitability for use within their application. Watson-Marlow and pureSU are registered trademarks of Watson-Marlow Limited. BioClamp, BioBarb, FlatBioEndCap, BioEndCap, BioValve and BioTube applicator are Trademarks of BioPure Technology Limited. Tri-Clamp is a registered trademark of Alfa Laval Corporate AB. Q-Clamp is used under licence.

wmfts.com/global



20 February 2024